


Section

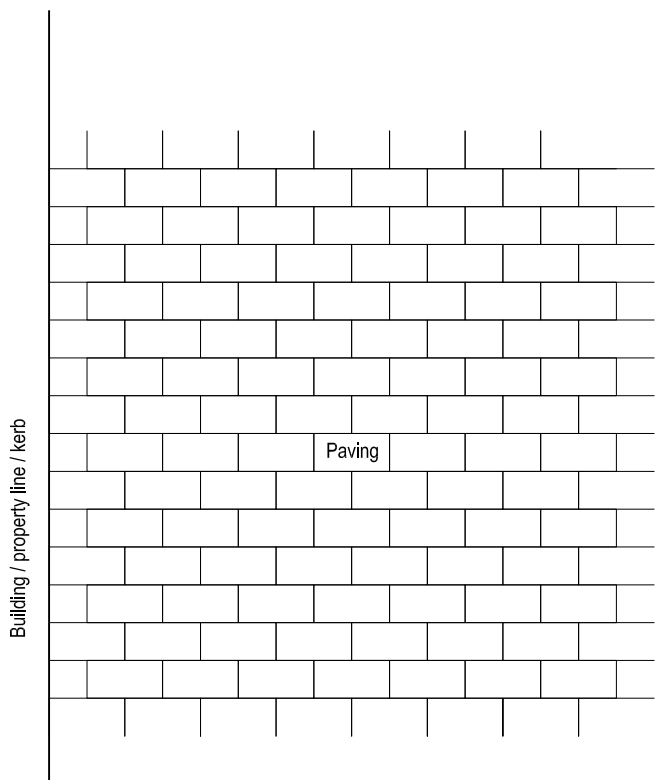

Plan

Sawn bluestone paving is the standard footpath surface used throughout the Central City and selected high use areas in Docklands.

The small bluestone pavers are to be used in selected pedestrian lane ways and plazas where there is only occasional light traffic.

The smaller paver size is 495 x 245 x 60mm, with a sawn finish with a 2mm chamfer to edges. Pavers are laid in a stretcher bond pattern in a 500 x 250mm module. Paving is generally laid perpendicular to the building line in laneways.

The paving should provide a consistent finish and be level and flush with existing pavement surfaces.

For typical construction details, refer to City of Melbourne, Engineering Standard Drawing:
Bluestone Paving Construction Details
Dwg No. 1P 50402.